
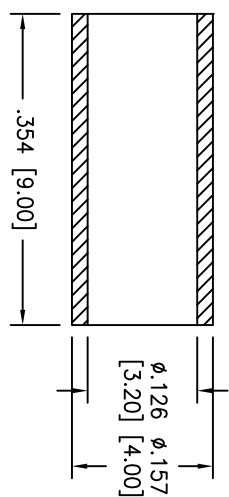



Rev	AWO #	Description	Date	Appr
-		RELEASED	12/22/11	

APPROVED: _____
 DATE: _____ TITLE: _____

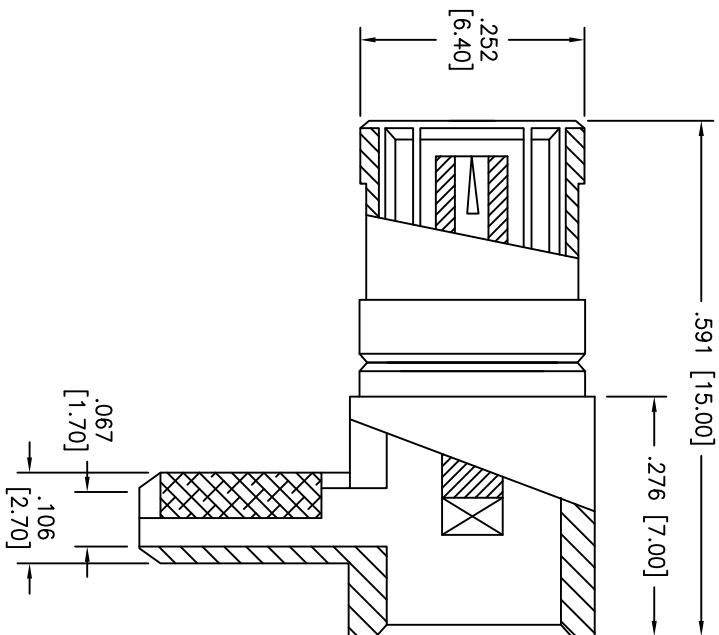

FERRULE	BRASS	GOLD
SPICOT	BRASS	GOLD
INSULATOR	TEFLON	
PIN	BRASS	GOLD
BODY	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SMB MALE R/A, 75 OHMS, GOLD PLATED, RG316

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS	DATE
DRAWN AY	12/22/11
CHECKED NP	12/22/11
APPROVED	

SIZE	PART NO.	REV.
X	RF3-03-T-03-75-G	-
REF:	S00049T	SCALE: NTS
SMB MALE R/A, 75 OHMS, GOLD PLATED, RG316		SHEET 1 OF 1

SPECIFICATIONS:

Electrical:
 Nominal Impedance: 75 ohms
 Frequency range: 0-4 GHz
 Working Voltage: 335 VRMS max.
 Dielectric Withstanding Voltage: 1000 VRMS min.
 Contact Resistance: 6 Milliohms max. (Center Contact)
 2.5 Milliohms max. (Outer Contact)
 Insulator Resistance: 1000 Megohms min.
 Environmental:
 Lead free, RoHS compliant.

