
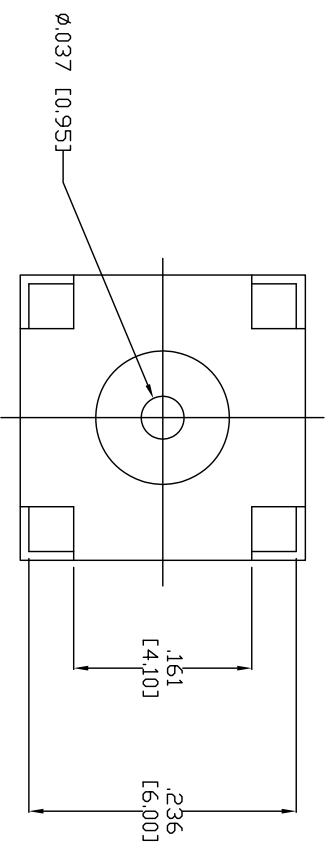


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|----------|------|
| - | 7375 | RELEASED | 12/15/06 | |

APPROVED: _____
 DATE: _____ TITLE: _____

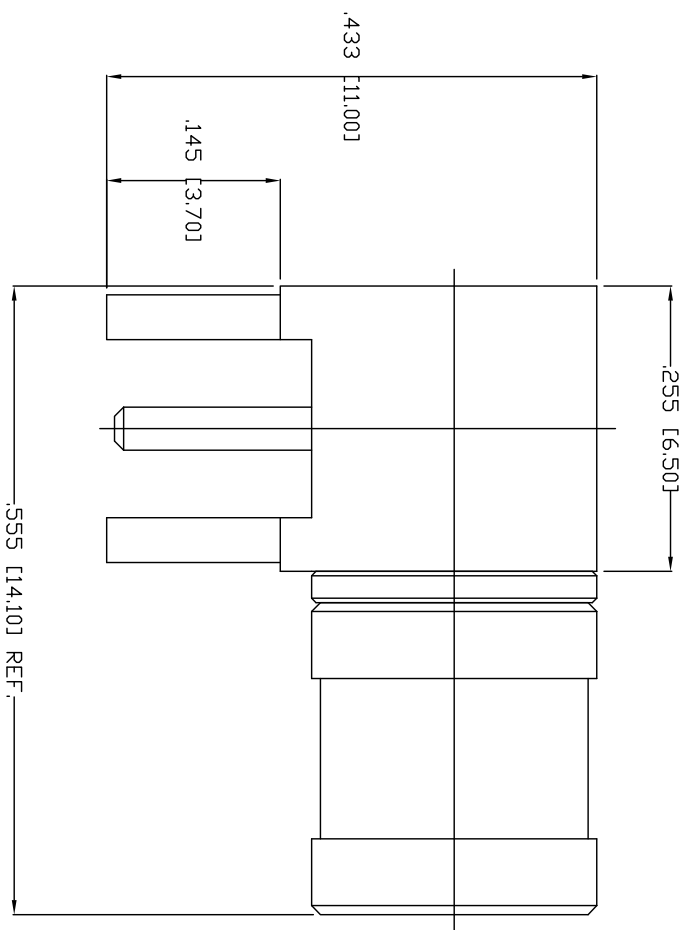

| ITEM | DESCRIPTION | MAT'L | QTY | PLATING |
|------|-------------|--------|-----|---------|
| 3 | INSULATOR | TEFLON | 1 | WHITE |
| 2 | PIN | BRASS | 1 | GOLD |
| 1 | BODY | BRASS | 1 | GOLD |

SPECIFICATIONS:

Electrical:

Nominal Impedance: 50 ohms
 Frequency range: 0-4 GHz
 Maximum peak voltage: 500V
 Insulation resistance: 5000 Mohm min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC rms

Environmental:

Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-0214

**RIGHT ANGLE SMB MALE
 PCB MOUNT 50 OHM**

| | |
|---|-------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED | |
| INCHES | HOLDS |
| .X ± .10 | ØXX ± .10 |
| .XX ± .020 | ØXXX ± .015 |
| .XXX ± .015 | ØXXX ± .010 |
| APPROVALS | DATE |
| DRAWN | BW |
| CHECKED | |
| APPROVED | |

| | | |
|------|------------------|--------------|
| SIZE | PART NO. | REV. |
| X | RF3-04-T-00-50-G | - |
| REF: | SCALE: NTS | SHEET 1 OF 1 |

6 5 4 3 2 1