Rev	AWO #	Description	Date	Appr
-		RELEASED	4/28/11	

APPROVED: _____

DATE: _____ TITLE: _____

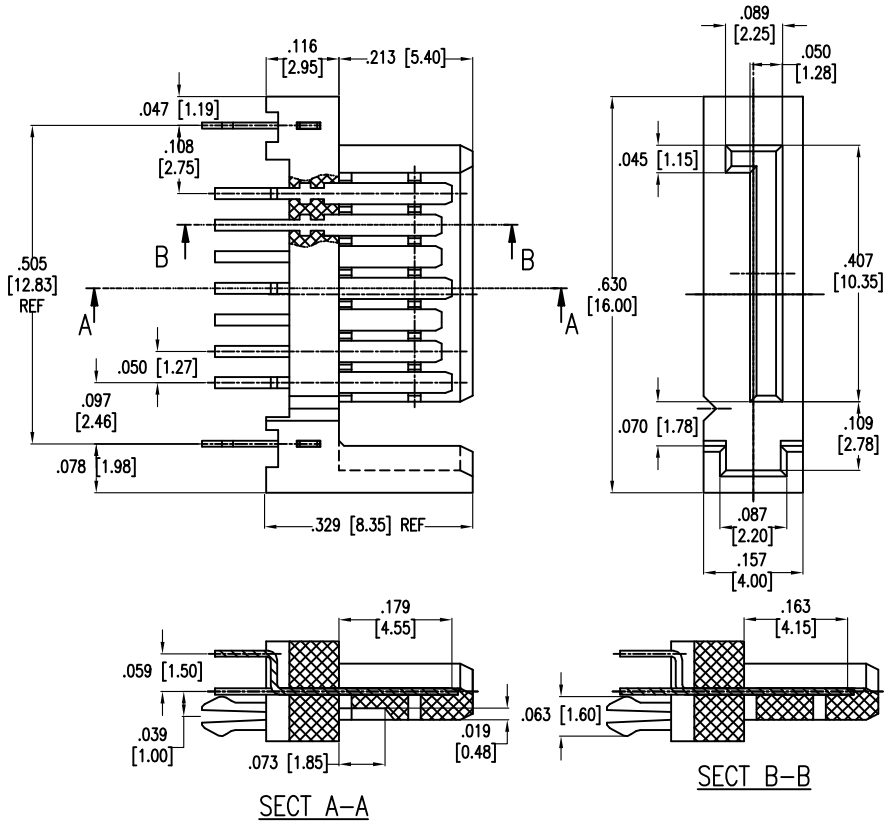

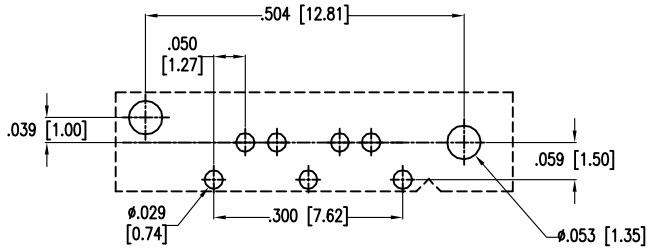

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Plating:
15u" Gold Flash over Nickel underplate on contact area,
Tin over Copper underplate on solder tails
Electrical:
Operating voltage: 100 VAC max
Current rating: 1.5 Amps max
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +125°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	4/28/11
CHECKED	AH	4/28/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
SATA CONNECTOR, 7PIN, STRAIGHT, DIP TYPE
DIP TYPE, 15u" SEL GOLD PLATED

SIZE	PART NO.	REV.
X	SATA-C-PR-VT-P-L1-15	-

REF: S00078T | SCALE: NTS | SHEET 1 OF 1