
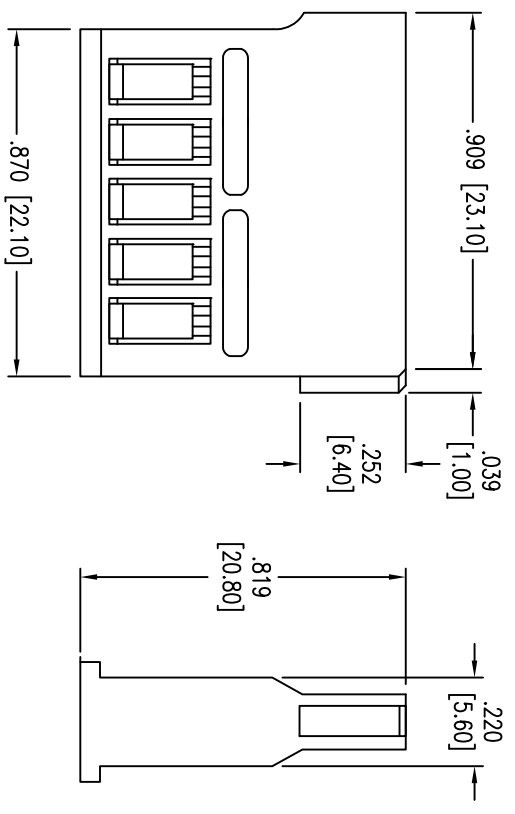


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/21/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

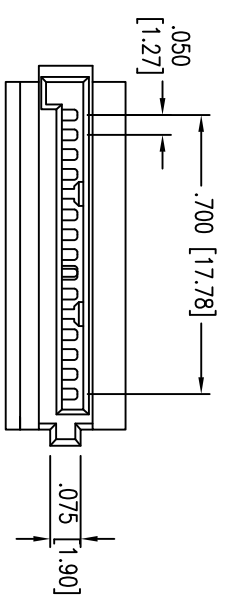

**SPECIFICATIONS:**

Material: Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Electrical:  
 Voltage rating: 15V DC  
 Current rating: 1.5 Amps  
 Insulation resistance: 1000 Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minut  
 Temperature Rating:  
 Operating temperature: -35°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN AY	7/21/11
CHECKED NP	7/21/11
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SATA CRIMP HOUSING 15 PIN

SIZE	PART NO.	SCALE	SHEET	REV.
X	SATA-CH-B-15P	NTS	1 OF 1	-
REF:	S00123T			

6 5 4 3 2 1