




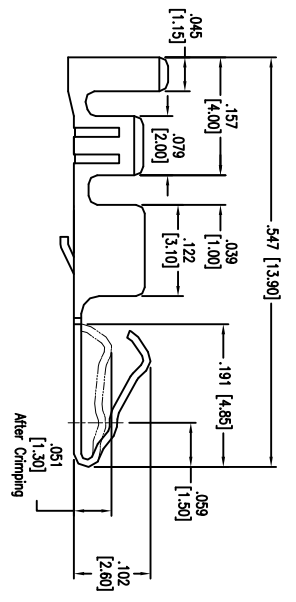


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/18/11	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

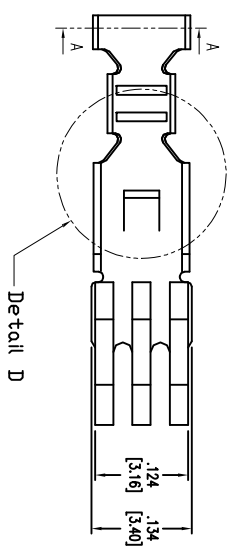

**SPECIFICATIONS:**

- Material: Phosphor Bronze, Sel gold plated
- Contacts: Phosphor Bronze, Sel gold plated
- Electrical: Operation voltage: UL&CSA 30 V AC/DC
- Current rating: UL 8.3 Amps, CSA 3.0 Amps
- Mechanical: Recommended Wire Awg: 16-24 Awg
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
.X INCHES	±.10
.XX	±.020
.XXX	±.015
.XXX	±.010
APPROVALS	DATE
DRAWN AY	4/18/11
CHECKED VW	4/18/11
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SATA TERMINAL, SEL GOLD PLATED

SIZE	PART NO.	REV.
X	SATA-CTA-SG-R	-
REF: S0073T	SCALE: NTS	SHEET 1 OF 1