

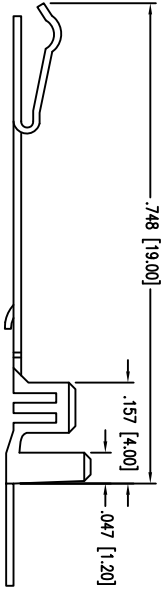
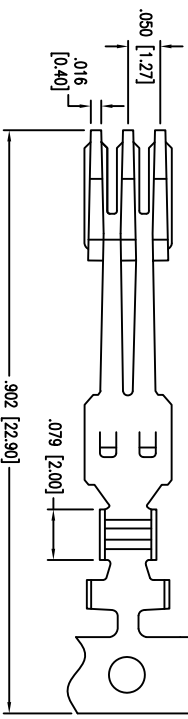



Rev	AWO #	Description	Date	Appr
-		RELEASED	7/21/11	

APPROVED: _____
 DATE: _____ TITLE: _____

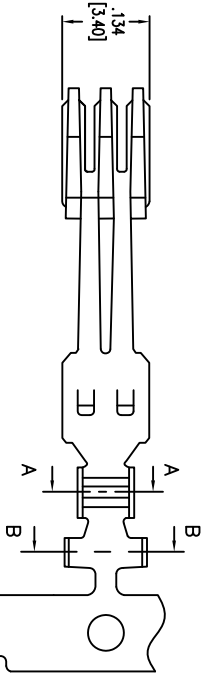

SPECIFICATIONS:

Material:
 Contacts: Phosphor Bronze, Sel gold plated
 Thickness: 0.25mm
Electrical:
 Voltage rating: 15V DC
 Current rating: 1.5 Amps
 Contact Resistance: 30 mohms max. initial
 Dielectric withstanding voltage: 500 VAC for 1 minut
 Wire range: #18~#22AWG
Temperature Rating:
 Operating temperature: -35°C to +85°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN AY	7/21/11
CHECKED NP	7/21/11
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE SATA TERMINAL, SEL GOLD PLATED	
SIZE X	PART NO. SATA-CTB-SG-R
REF: S00723T	SCALE: NTS
	SHEET 1 OF 1