

6

5

4


3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/23/05	
A		CHANGED DESIGN	5/11/09	

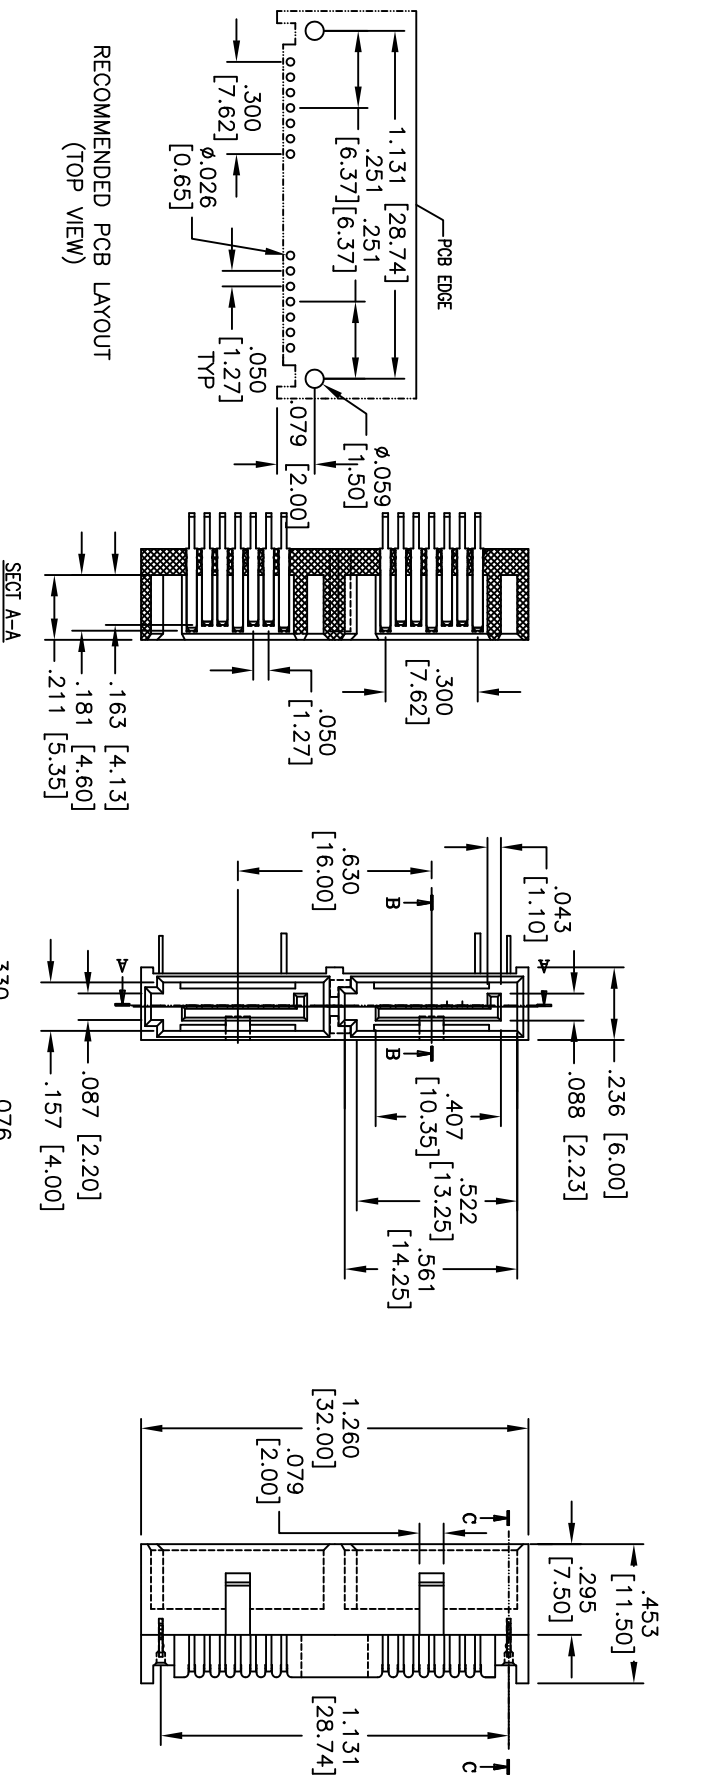

SPECIFICATIONS:
 Material: _____
 Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: _____
 Gold flash over Nickel underplate on mating area,
 Tin over Copper underplate on tails

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 1.5 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VAC
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: _____
 Operating temperature: -55°C to +125°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SERIAL ATA CONNECTOR, TYPE E
 RIGHT POLARIZATION, RIGHT ANGLE, KEY

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	SATA-E-PR-RT-K	A
REF:	S00078T	SCALE: NTS
SHEET 1 OF 1		