
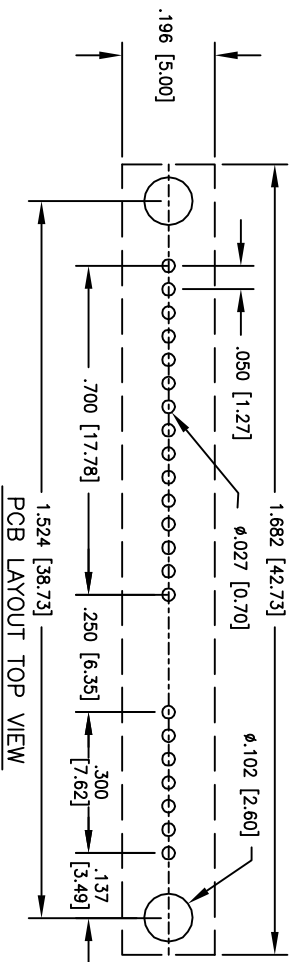
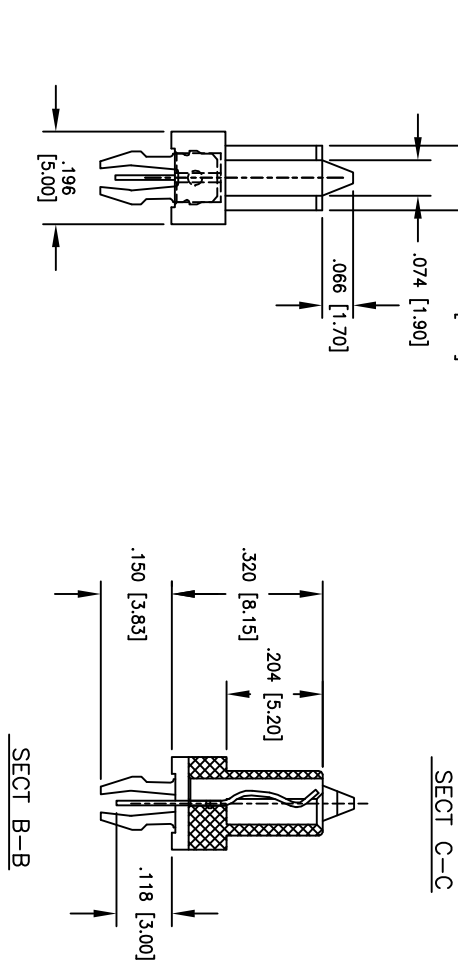
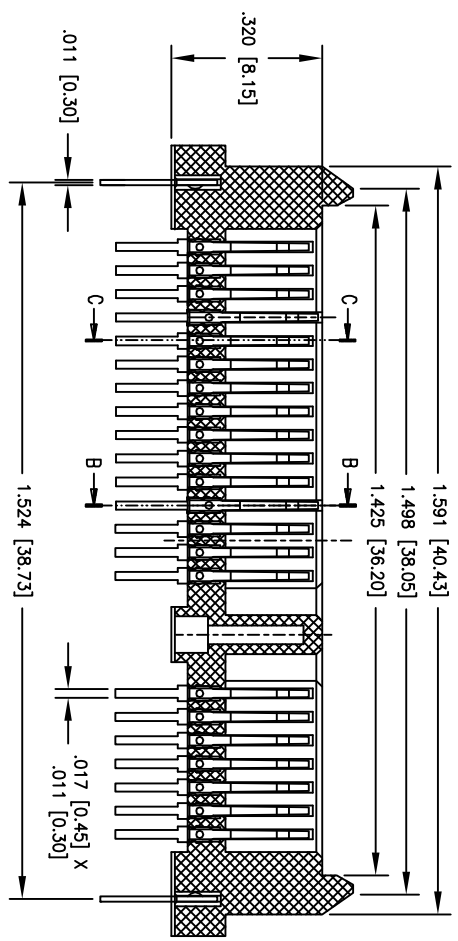


APPROVED: _____ DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/11/06	
A		REVISED DIM.	9/03/09	

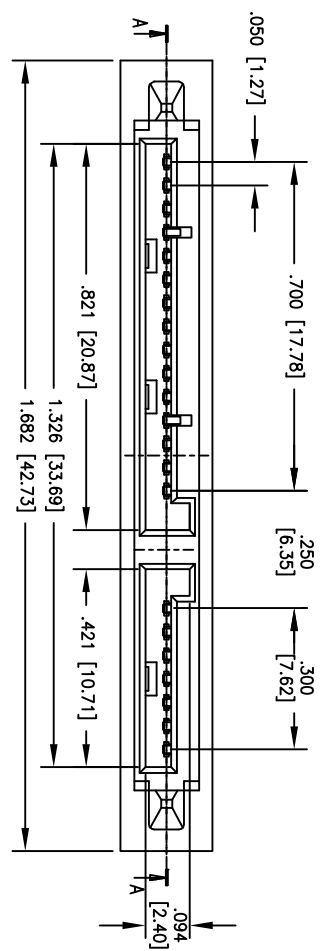

SPECIFICATIONS:

- Material: Insulator: LCP, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on solder tails
- Electrical: Operating voltage: 100 VAC max, Current rating: 1.5 Amps max, Contact resistance: 30 mohms max, Insulation resistance: 1,000 Mohms min @ 500 VDC, Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +125°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SATA 7+15P DIP SINGLE ROW TYPE
FEMALE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		Holes		DATE	
.X	± .10	ØXX	± .10	ØXX	± .015		
.XX	± .020	ØXXX	± .015				
.XXX	± .015	ØXXXX	± .010				
APPROVALS		DATE		DATE			
DRAWN	BW	12/11/06					
CHECKED							
APPROVED							
SIZE	PART NO.	SATA-N-PM-VT-02		REV.	A		
REF:	SCALE:	MKS		SHEET	1 OF 1		