

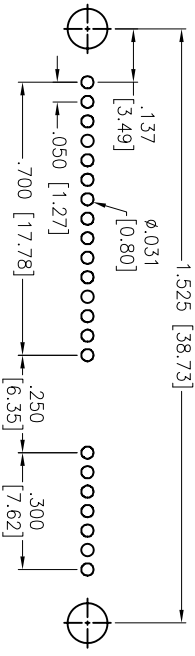
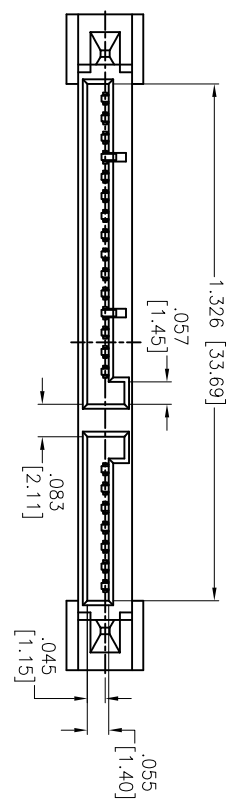
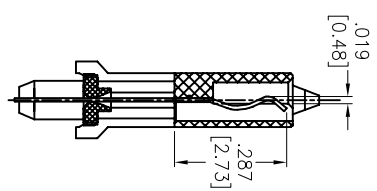


Rev	AWO #	Description	Date	Appr
-		RELEASED	05/21/12	

APPROVED: _____
 DATE: _____ TITLE: _____

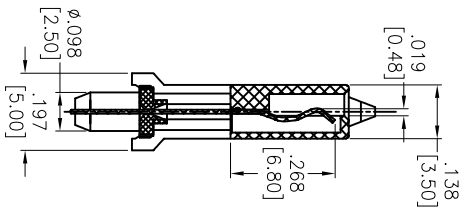

RECOMMENDED PCB LAYOUT

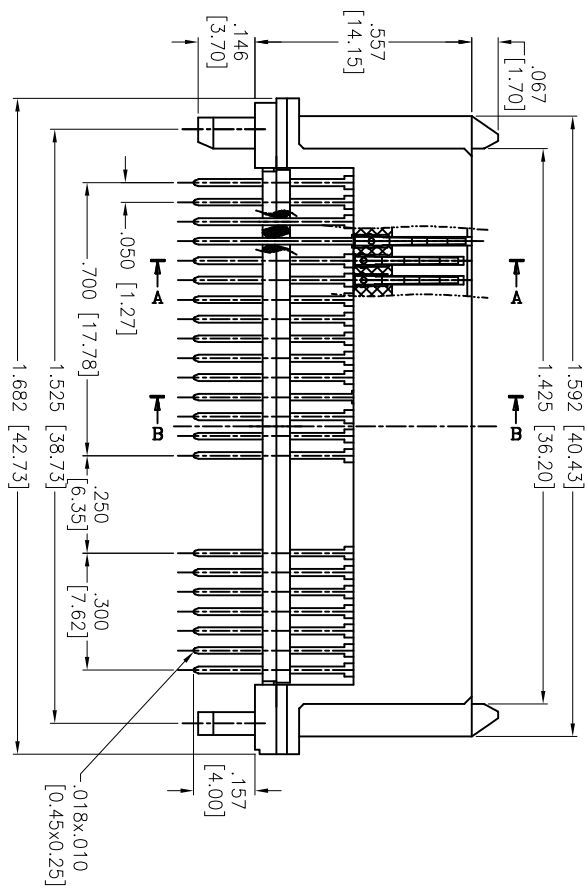

SPECIFICATIONS:

- Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: 15u" Gold over Nickel underplate on contact area, Tin over Copper underplate on PCB tails
- Electrical: Operating voltage: 100 VAC max, Current rating: 1.5 Amps max, Contact resistance: 30 mohms max, Insulation resistance: 1,000 Mohms min @ 500 VDC, Dielectric withstanding voltage: 500 VAC for 1 minute
- Mechanical: Temperature Rating: Operating temperature: -55°C to +125°C, Environmental: Lead free, RoHS compliant.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SATA 7P + 15P DIP SINGLE ROW TYPE
 FEMALE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		DRAWN: TW		DATE: 05/21/12	
INCHES: .X ± .10, .XX ± .020, .XXX ± .015		Holes: ØX ± .10, ØXX ± .015, ØXXX ± .010		APPROVALS:	
CHECKED: AY	DATE: 05/21/12	SIZE: X	PART NO.: SATA-N-PM-VT-03-15	SCALE: NTS	SHEET 1 OF 1
APPROVED:		REF: S00078T			