

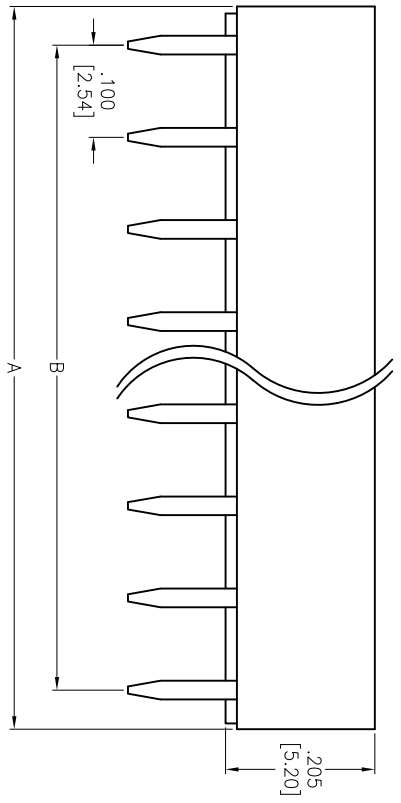



Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/05	
A		REDRAWN	12/14/09	
B		REDRAWN	05/25/12	

APPROVED: _____
 DATE: _____ TITLE: _____

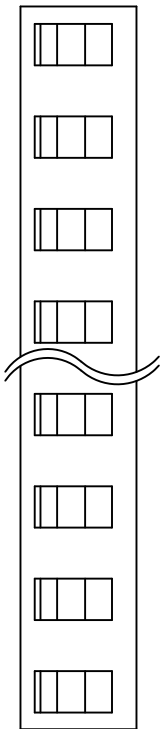

SPECIFICATIONS:
 Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall
 Electrical: Current rating: 1 Amp max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +85°C
 Environmental: Lead free, RoHS compliant

Positions: 4, 7, 8, 9, 10, 11, 12, 14, 16, 20, 21, 24 & 32
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZE DATE
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DRAWN	SS	1/28/05	SIZE	PART NO.	SIS-XX-T	REV.	B
CHECKED			REF:	S00099T	SCALE: NTS	SHEET 1 OF 1	
APPROVED			TITLE: SINGLE ROW IC SOCKET .100" ROW SPACING, TIN PLATED				

