

6

5

4

3


2

1


APPROVED: _____

DATE: _____ TITLE: _____



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/6/20	



Section A-A



Section B-B

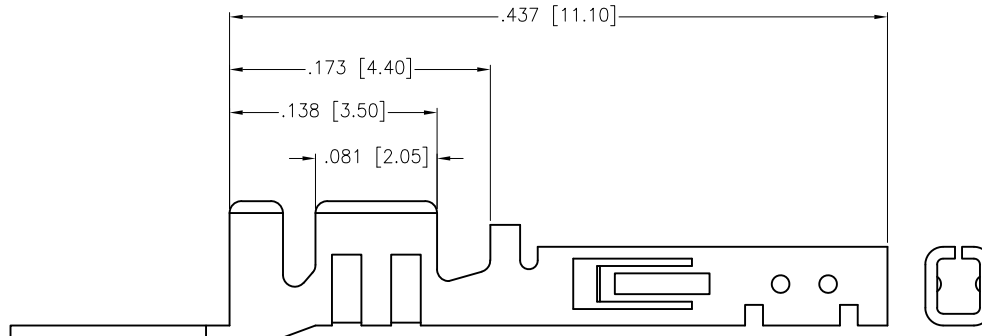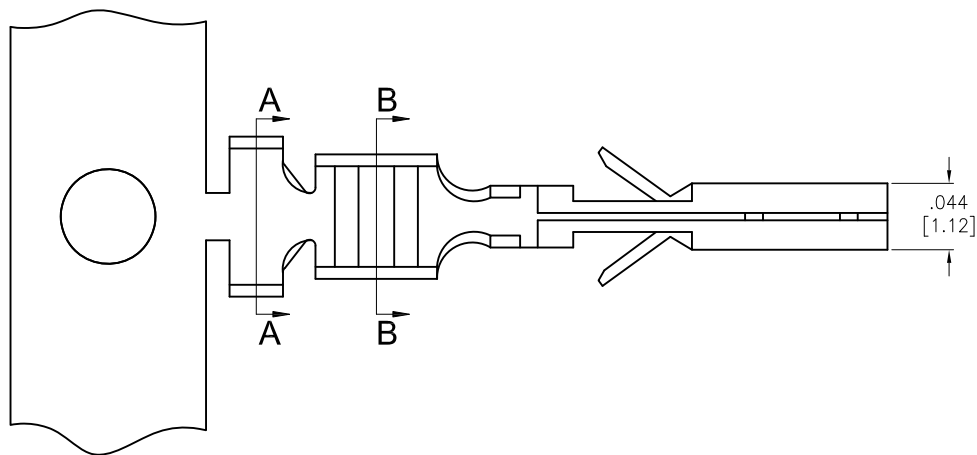

SPECIFICATIONS:

Material:
 Contact: Phosphor Bronze, Tin Plated
 Thickness: 0.2mm

Electrical:
 Voltage rating: 250 V AC/DC
 Current rating: 20 Awg: 5 Amps max
 22 Awg: 5 Amps max
 24 Awg: 4 Amps max
 26 Awg: 3 Amps max
 28 Awg: 2 Amps max
 30 Awg: 1 Amp max

Contact resistance: 10 mohms max.
 Dielectric withstanding voltage: 1500 VAC for 1 minute

Environmental:
 Lead free, RoHS compliant.



P/N	Wire size	Dim. A	Dim. B	Dim. C	Dim. D
DMT-A5-C-F-T-R	#26~#30AWG	.071 [1.80]	.063 [1.60]	.094 [2.40]	.075 [1.90]
DMT-B5-C-F-T-R	#20~#24AWG	.083 [2.10]	.083 [2.10]	.106 [2.70]	.098 [2.50]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN LH CHECKED AY1 APPROVED		DATE 3/6/20 3/6/20	
TITLE .118" [3.0mm] CRIMP TERMINAL, TIN PLATED, ON REEL		SIZE X	PART NO. DMT-X5-C-F-T-R
REF: S00015T		SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1