
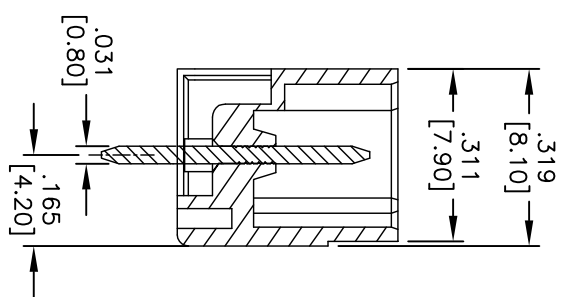
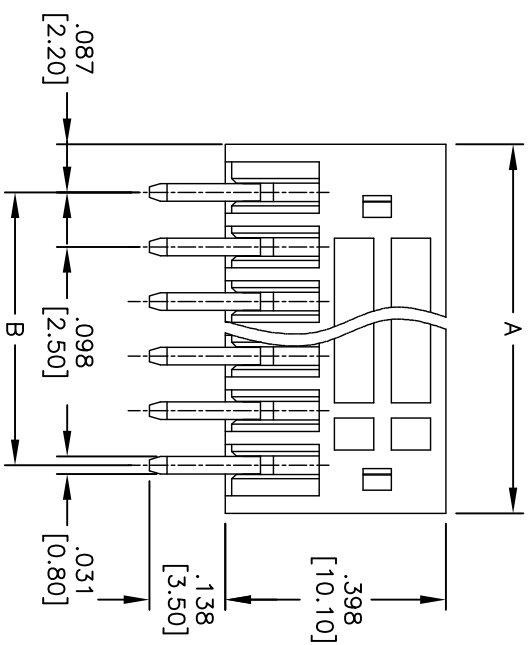
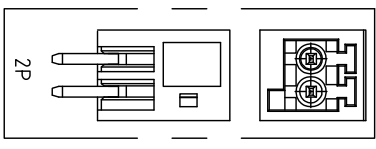
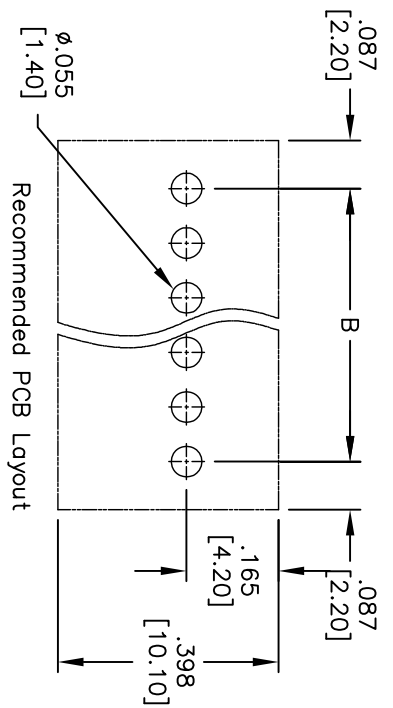


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/18/11	

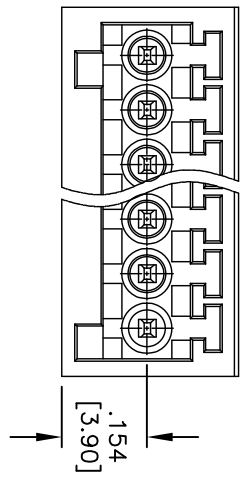

Poles: 2 thru 24  
 A = .098 [2.50] X No. of Positions + .075 [1.90]  
 B = .098 [2.50] X No. of Spaces

**SPECIFICATIONS:**  
 Material: Thermoplastic, rated UL 94V-0  
 Insulator color: Green  
 Contact: Brass, Tin plated.  
 Electrical:  
 Operation voltage: 150 VAC  
 Current rating: 4 Amps  
 Mechanical:  
 Withstanding Voltage: 1.3KV  
 Environmental:  
 Operating temperature: -40°C to +115°C  
 Lead free, RoHS compliant.



**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .098 [2.50] PITCH, VERTICAL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
X .X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN TW	8/18/11
CHECKED AY	8/18/11
APPROVED	

REF: S00007T	SCALE: NTS	SHEET 1 OF 1
SIZE PART NO. EBS-XX-V-180	REV.	