
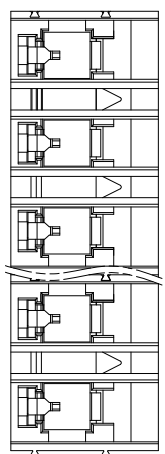
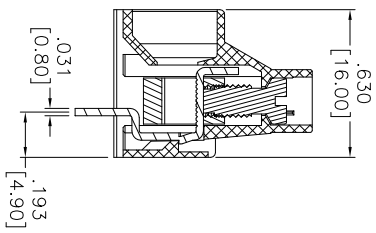
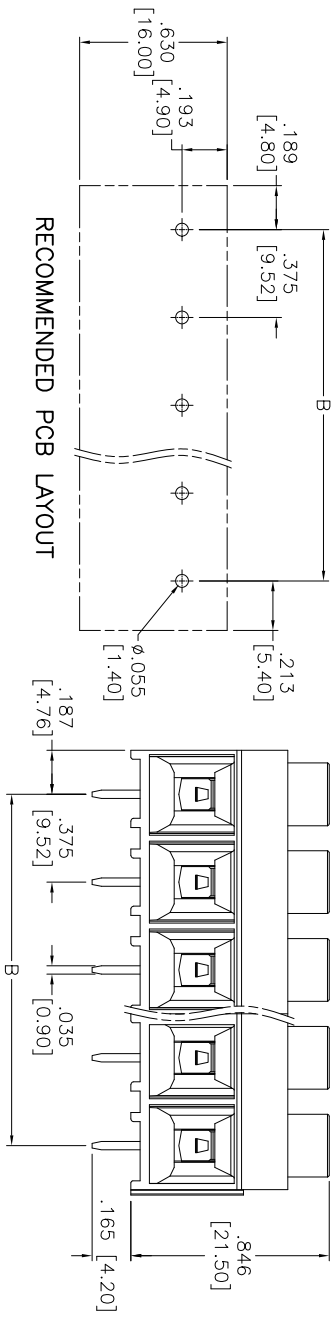


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/14/14	

APPROVED: _____

DATE: _____ TITLE: _____

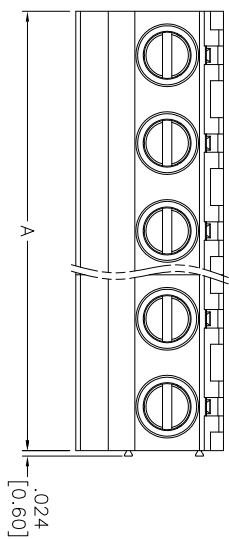

SPECIFICATIONS:

Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Clamp: Brass, Nickel plated
 Screw: M3.5, Steel, Zn plated.
 Contact: Copper Alloy, Tin plated.
 Electrical:
 Operation voltage: 690 VAC
 Current rating: 32 Amps
 Mechanical:
 Wire strip length: 7-8mm
 Torque (Lb-In): 5.5
 Solid wire: 10-24 AWG
 Stranded: 10-24 AWG
 Withstanding Voltage: 1.6KV
 Temperature Rating:
 Operating temperature: -40°C to +115°C
 Environmental:
 Lead free, RoHS compliant.

Positions: 02 thru 16
 A = .375 [9.52] X No. of Positions
 B = .375 [9.52] X No. of Spaces

	Tolerance
2-6P	±.006 [0.15]
7-12P	±.010 [0.25]
13-16P	±.014 [0.35]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, PCB, VERTICAL, 9.52MM PITCH
 SINGLE ROW PIN

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM	
TOLERANCES: EXCEPT AS NOTED	HILES
.X ±.10	ØX ±.10
.XX ±.020	ØXXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN AY	8/14/14
CHECKED LL	8/14/14
APPROVED	

REV.	SCALE	SHEET 1 OF 1
	NTS	



6 5 4 3 2 1