
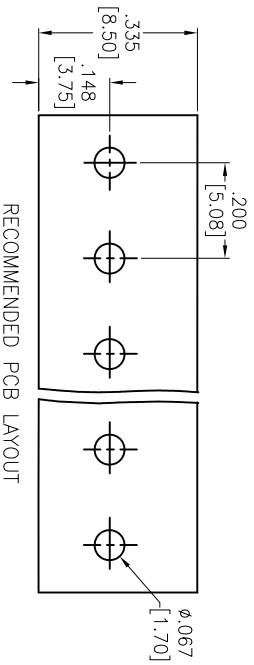
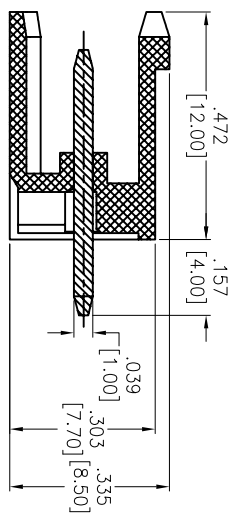


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/16/13	

APPROVED: _____

DATE: _____ TITLE: _____

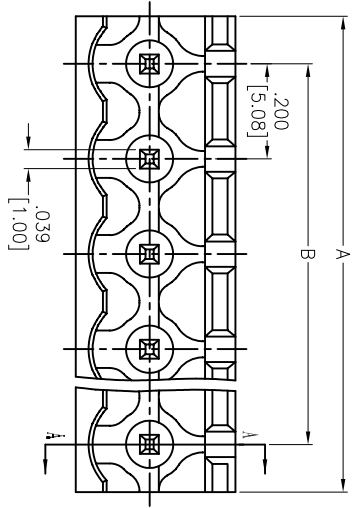

Positions: 02 thru 24
 A = .200 [5.08] x No. of Positions
 B = .200 [5.08] x No. of Spoces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .200 [5.08] PITCH, VERTICAL

SPECIFICATIONS:
 Material: Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 15 Amps
 Contact resistance: 20 Mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED		ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED		INCHES	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	AY		10/16/13
CHECKED	NP		10/16/13
APPROVED			

REF:	S00067C	SCALE:	NTS	SHEET	1 OF 1
SIZE	PART NO.	REV.			
X	EBPA-XX-D				

