
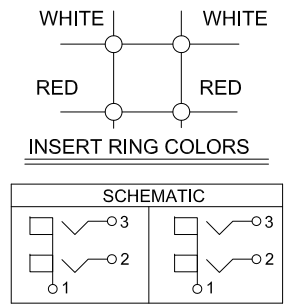
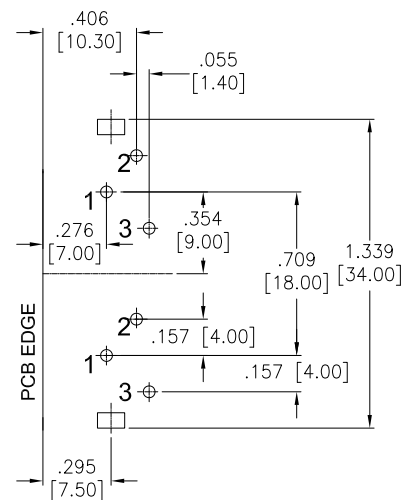


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/13/16	

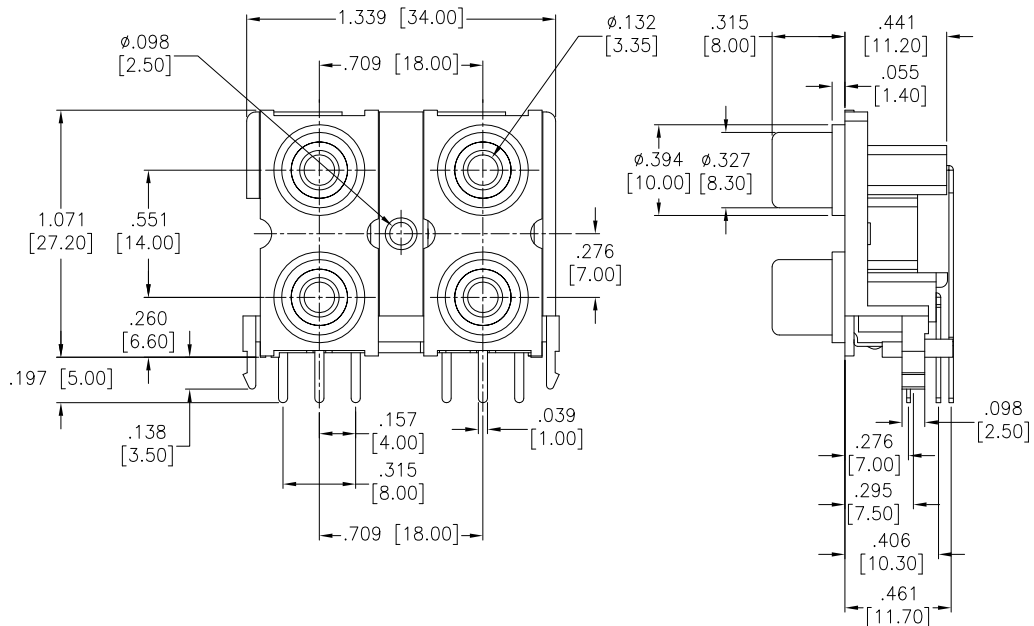

SPECIFICATIONS:

Material:
 Insulator: ABS, Colors: White
 Cover: ABS, Colors: Black
 Insert Ring: PBT, Glass reinforced, rated UL 94V-0
 Insert Ring colors: White, Red
 Barrel: Brass, Nickel plated
 Contacts: Brass
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Current rating: 2A Max. @12V DC
 1A Max. @100V AC
 Contact resistance: 30 mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Mechanical:
 Durability: 4,000 Cycles
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
.X ± .10	∅.X ± .10		
.XX ± .020	∅.XX ± .015	TITLE: RCA JACK, 4 PORTS, 2 X 2	
.XXX ± .015	∅.XXX ± .010	DRAWN: AY DATE: 5/13/16	
APPROVALS		SIZE: X	PART NO.: RCA-10A-4-W/R/W/R
CHECKED: YC	DATE: 5/13/16	REF: S00095T	SCALE: NTS
APPROVED:		SHEET 1 OF 1	