

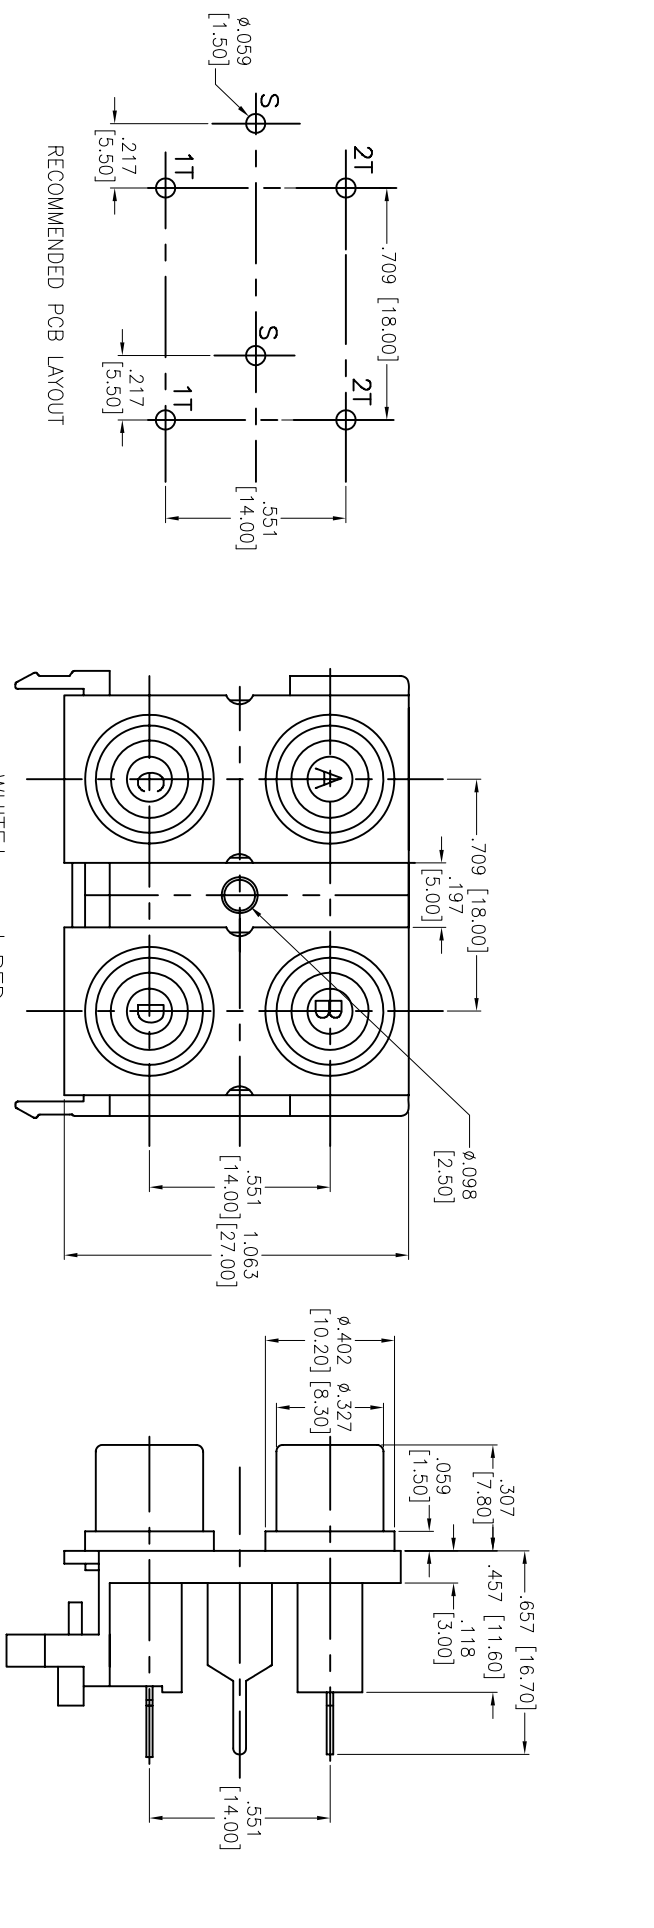


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/18/15	

APPROVED: _____
 DATE: _____ TITLE: _____



RECOMMENDED PCB LAYOUT



SPECIFICATIONS:

- Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
- Insulator Color: White
- Washer: ABS, Color: White, Red
- Cover: ABS, Color: Black
- Contacts: Brass
- Barrel: Brass, Gold plated
- Plating: Tin over Copper underplate
- Electrical: Tin over Copper underplate
- Voltage & Current rating: 1A @12V DC
- Contact resistance: 30 mohms max. initial
- Insulation resistance: 100 Mohms min.
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +60°C
- Environmental: Lead free, RoHS Compliant

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 4 PORTS, 2 X 2

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TITLE	
TOLERANCES: EXCEPT AS NOTED		RCA JACK, 4 PORTS, 2 X 2	
INCHES		DATE	
.X ± .10	ØX ± .10		
.XX ± .020	ØXX ± .015		
.XXX ± .015	ØXXX ± .010		
APPROVALS		SIZE	
DRAWN	AY	X	
CHECKED	CH	PART NO.	
APPROVED		RCA-46-4-W/R-G	
		REF:	S00047T
		SCALE:	NIS
		SHEET	1 OF 1

