


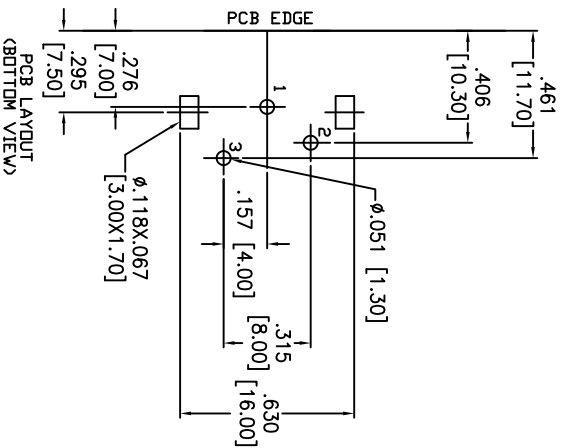


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/2/12	
A		ADDED PIN	10/2/12	
B		UPDATE DIM. & SPEC.	7/29/15	AV/NC

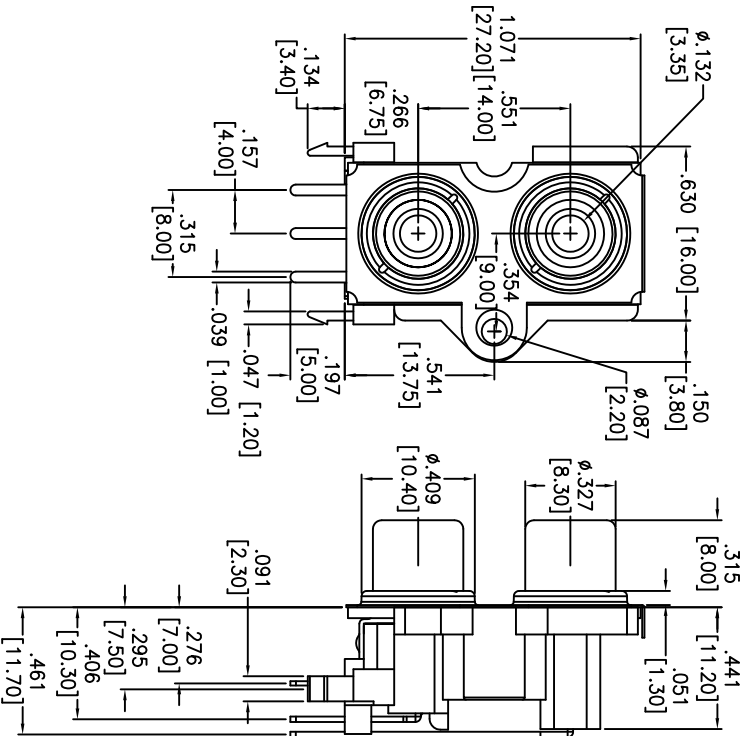

ADAM P/N	A	B	Insulator
RCA-8S-4-BL/BL-BL	BLUE	BLUE	BLUE
RCA-8S-4-W/W-W	WHITE	WHITE	WHITE
RCA-8S-4-Y/Y-Y	YELLOW	YELLOW	YELLOW
RCA-8S-4-R/R-R	RED	RED	RED
RCA-8S-4-G/G-G	GREEN	GREEN	GREEN
RCA-8S-4-B/B-B	BLACK	BLACK	BLACK

SPECIFICATIONS:

Material: _____
 Housing: ABS, color See Table
 Cover: ABS, color See Table
 Ring: PBT, color See Table
 Terminal: Brass, Tin plated
 Barrel: Brass, Nickel plated
 Shell Cover: Brass, Nickel plated
 Electrical:
 Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 2 PORTS, GANGED, W/SHEEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
.X	$\pm .10$	ϕ XX	$\pm .10$.XXX	$\pm .015$
.XX	$\pm .020$	ϕ XXX	$\pm .015$.XXX	$\pm .010$
.XXX	$\pm .015$	ϕ XXX	$\pm .010$		
APPROVALS		DATE		TITLE	
DRAWN	AY	10/2/12		RCA JACK, 2 PORTS, GANGED, W/SHEEL	
CHECKED	LW	10/2/12		909 RAHWAY AVENUE, UNION, NJ 07083	
APPROVED				PHONE: 908-687-5000 FAX: 908-687-5710	

SIZE	PART NO.	REV.
X	RCA-8S-4-XX-X	B

REF: S0095T SCALE: NTS SHEET 1 OF 1