
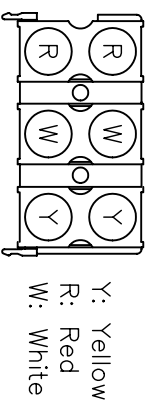
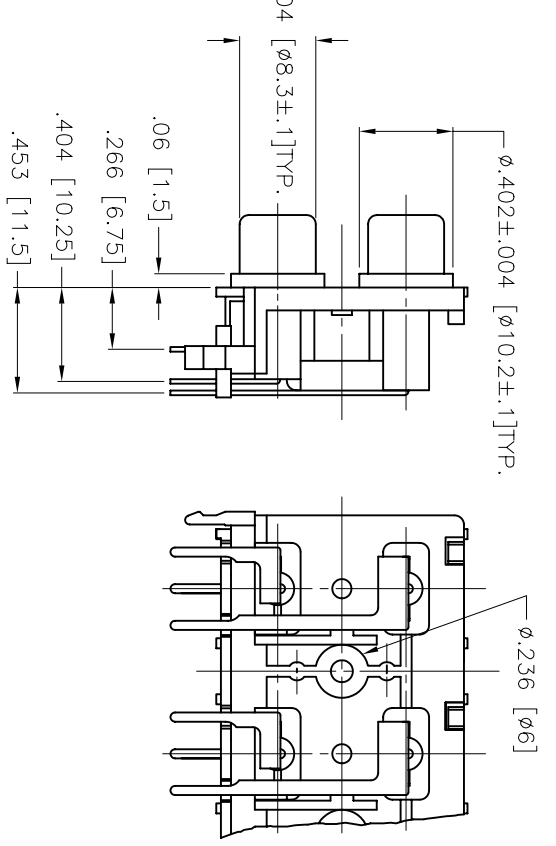




APPROVED: _____
 DATE: _____ TITLE: _____

Rev	Description	Date	Appr
-	Preliminary	9/28/00	

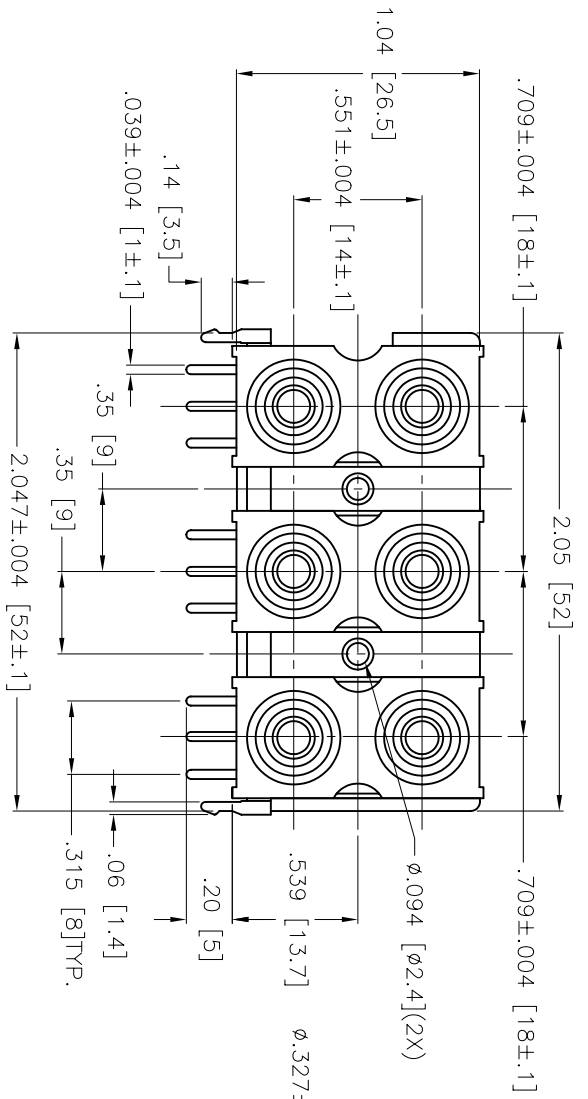

Color Layout

Y: Yellow
 R: Red
 W: White

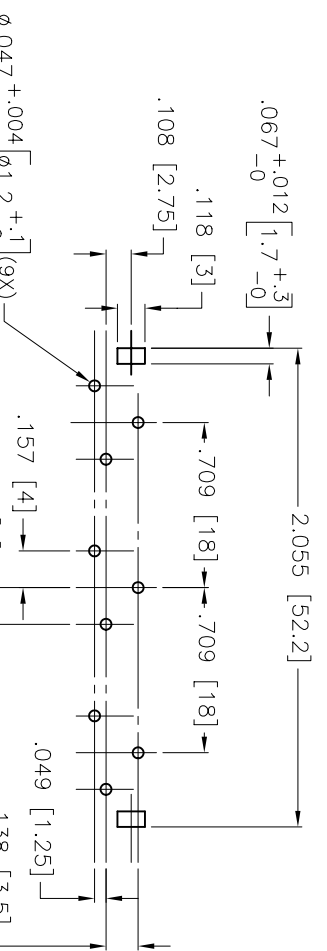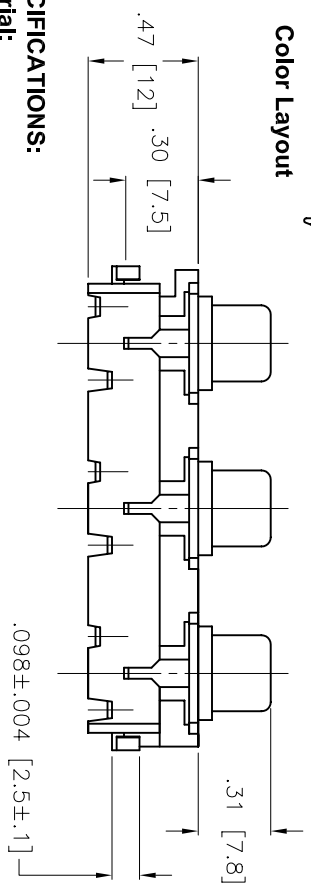

Recommended PCB Layout
 Tolerance: ±.004 [±.10]

SPECIFICATIONS:

Material:
 Insulator: ABS, rated UL94HB, Color: Black
 Contacts: Copper Alloy

Plating:
 Center Contacts: Tin/Lead Plated
 Outer Contacts: Nickel Plated

Electrical:
 Voltage rating: 34 VDC or AC
 Current rating: 2 Amps DC or AC
 Contact resistance: 30 mohms max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:
 Operating temperature: -25°C to +70°C

ADAM TECH

DESCRIPTION:
 6 Port RCA Jack

Dimension in IN [MM]
Tolerance
 (Unless Otherwise Specified)
 .XX ± .010
 .XXX ± .005

PART NUMBER:
 RCA - H96RWY

DATE: 9/28/00	SCALE: NTS	SHEET 1 OF 1 SHEETS	LOG 11226	REF. 10986	REV. -
DRAWN: WGM		APPR:		SHEET 1 OF 1 SHEETS	