



Rev	AWO #	Description	Date	Appr
-	9259	RELEASED	12/03/08	

APPROVED: _____
 DATE: _____ TITLE: _____

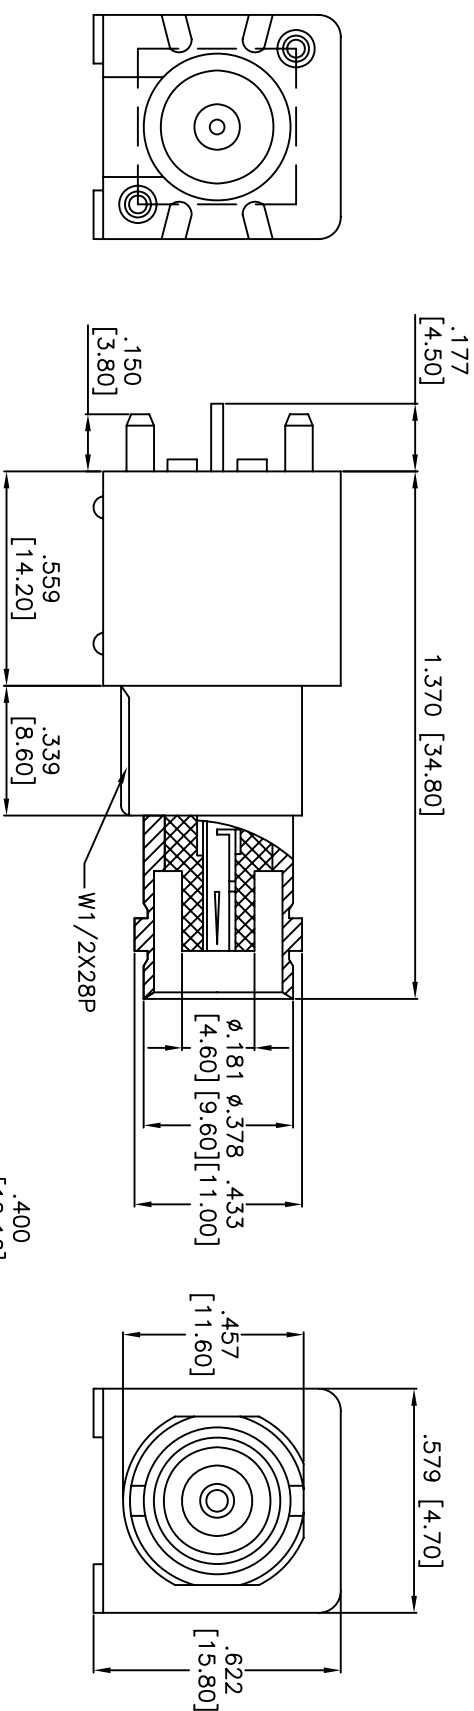

DESCRIPTION	MATERIAL	FINISH
CENTER CONTACT	BRASS	GOLD PLATED
FIXED	BRASS	TIN PLATED
CONNECTING WIRE	BRASS	TIN PLATED
GROUND CONDUCTOR	BRASS	TIN PLATED
LONG INSULATING GEL	POM	NONE
SHORT INSULATING GEL	POM	NONE
BODY	ZINC	NICKEL PLATED
HOUSING	PBT	BLACK
DESCRIPTION	MATERIAL	FINISH

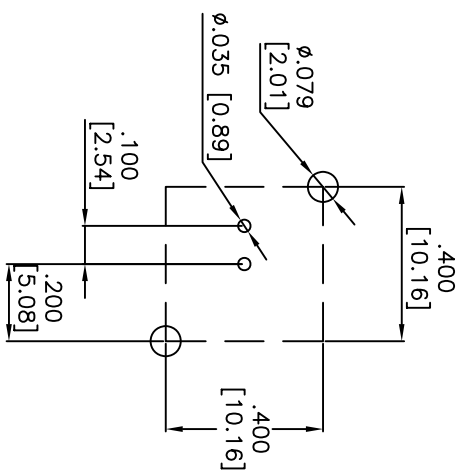

SPECIFICATIONS:

Electrical:
 Nominal Impedance: 50 ohms
 Frequency range: 0-4 GHz
 Working Voltage: 500 VRMS max.
 Dielectric Withstanding Voltage: 1500 VRMS min.
 Contact Resistance: 3 Milliohms max. (Center Contact)
 2 Milliohms max. (Outer Contact)
 Insulator Resistance: 5000 Megohms min.
Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

BNC JACK PCB MOUNT WITH 180°C, 50 ohm

APPROVALS		DATE
DRAWN	DY	12/03/08
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	RF1-01V-D-00-50	-
REF:	S00049T	
SCALE:	NTS	
SHEET	1 OF 1	

6 5 4 3 2 1