



Rev	AWO #	Description	Date	Appr
-		RELEASED	7/21/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

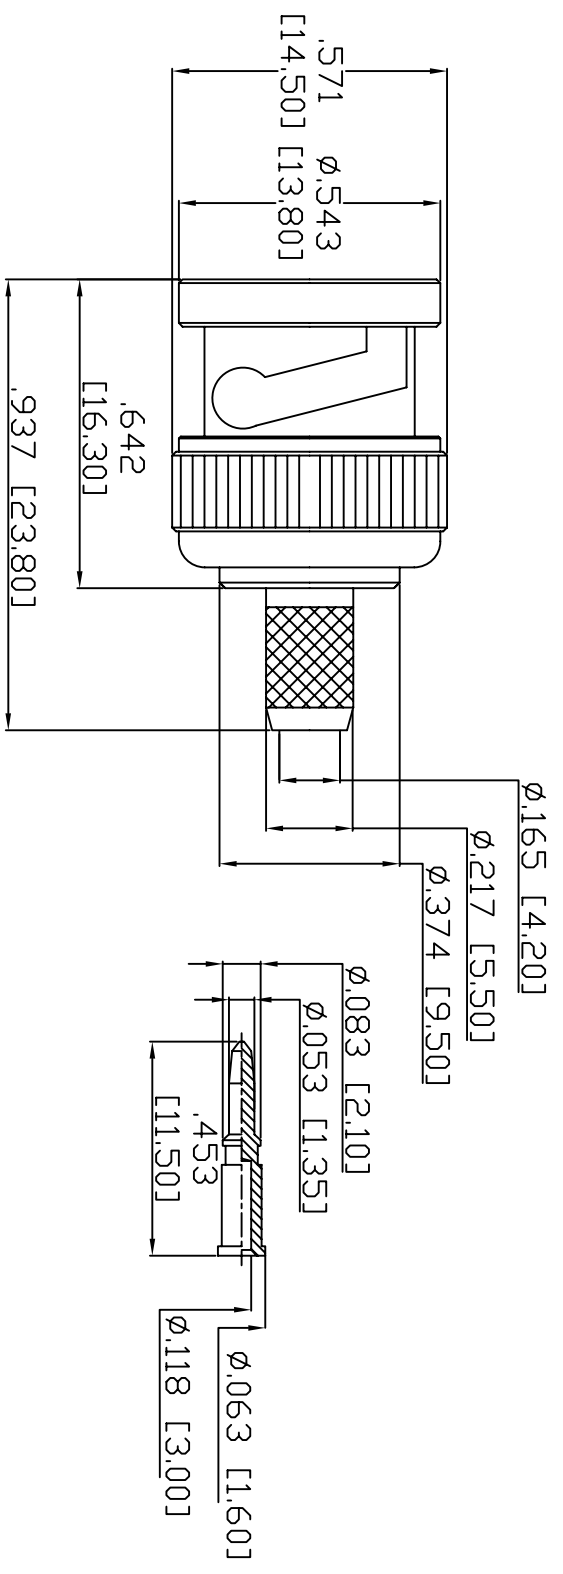

GASKET	RUBBER	ORANGE	1
RETAINING RING	SK-5	NICKEL	1
SPRING	SK-5	NICKEL	1
WASHER	IRON	NICKEL	1
SHELL	BRASS	NICKEL	1
FERRULE	BRASS	NICKEL	1
DIELECTRIC	TEFLON	NONE	1
PIN	BRASS	GOLD	1
BODY	BRASS	NICKEL	1
DESCRIPTION	MATERIAL	FINISH	QTY

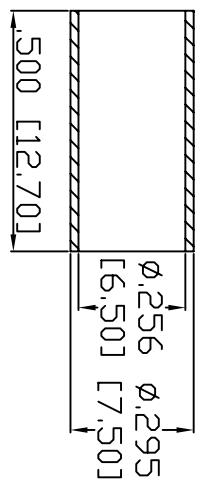

**SPECIFICATIONS:**

**Electrical:**  
 Nominal Impedance: 50 ohms  
 Frequency range: 0-4 GHz  
 Maximum peak voltage: 500V  
 Insulation resistance: 5000 Mohm min @ 500 VDC  
 Dielectric withstanding voltage: 1500 VAC rms  
**Environmental:**  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 .X ±.10 Ø.X ±.10  
 .XX ±.020 Ø.XX ±.015  
 .XXX ±.015 Ø.XXX ±.010

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

BNC MALE CRIMP FOR H155 LMR240

APPROVALS	DATE
DRAWN DY	7/21/08
CHECKED	
APPROVED	

TITLE	SIZE	PART NO.	REV.
BNC MALE CRIMP FOR H155 LMR240	X	RF1-03-T-20-50	-
REF:	SCALE:	NTS	SHEET 1 OF 1

6 5 4 3 2 1